

# Copper Pigtails 912 and 913 Series

## Application

Pigtails are available in a variety of connections, sizes and styles. Care should always be taken in selecting the proper pigtail for a particular application.

Note: RegO recommends a new pigtail be installed with every new and replaced regulator.

## Features


- Heavy duty construction.
- Individually soldered connections to the copper tubing.
- Each pigtail is individually tested prior to shipment.

## Materials

Tubing..... Copper  
Connection ..... Brass



913PS12

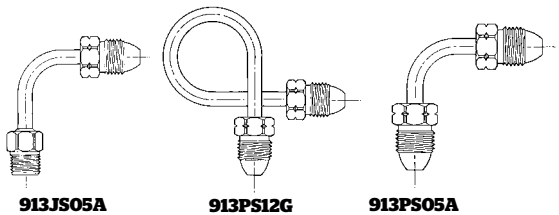

913JS05A

913PS12G

913PS05A

## Bent Pigtails Ordering Information

Connections	Approximate Length	Part Number		Type/Degree of Bend
		3/8" Tube		
		3/8" Hex Short Nipple	1/2" Hex Long Nipple	
1/4" M. NPT x M. POL	5"	913JS05A	913PS05A	90°
M. POL x M. POL	12"	913PS12G	913PS12H	270° Right Hand
		913PS12H	913PS12S	270° Left Hand
		913PS12S		360°

## Straight Pigtails Ordering Information

Connections	Approximate Length	Part Number		
		1/4" Tube		3/8" Tube
		3/8" Hex Short Nipple	1/2" Hex Long Nipple	3/8" Hex Short Nipple
M.POL x M.POL	5"	-	1/2"	913JS05
	12"	912PS12	-	913PS12
	20"	912PS20	912PA20	913PS20
	30"	912PS30	-	913PS30
	36"	912PS36	912PA36	913PS36
1/4" Inverted Flare x M.POL	48"	912PS48	912PA48	913PS48
	12"	912FS12	-	-
	20"	912FS20	912FA20	-
	30"	912FS30	-	-
1/4" M.NPT x M.POL	36"	912FS36	-	-
	5"	-	-	913JS05
	12"	912JS12	-	913JS12
	20"	912JS20	-	913JS20
1/2" M.NPT x M.POL	30"	-	-	913JS30
	36"	912JS36	-	-
1/2" M.NPT x M.POL	12"	-	-	913LS12
1/2" M.NPT x 3/8" M.NPT	12"	-	-	913KL12

## Dielectric Pigtails



D912

Part Number	Approximate Length	Tube	Connections
D912P12	12"	1/4"	M.POL x M.POL
D912P20	20"		
D912P30	30"		
D912J12	12"		
D912J20	20"		
D912J30	30"	3/8"	M.POL x M.POL
D913P12	12"		
D913P20	20"		
D913P30	30"		
D913P36	36"		
D913P48	48"		

A

## Inlet Fittings

Part Number	Description
970	Hard nose POL with wrench nut.
970AX	Hard nose POL with wrench nut and excess flow.
970AXS	Soft nose POL with wrench nut and excess flow.
970WXS	
3199W	Heavy duty hard nose POL with wrench nut and excess flow.
970AW	Soft nose POL with Handwheel.
970HT	Soft nose POL with Handwheel and 60 DMS orifice.
970S	Soft nose POL with wrench nut and 60 DMS orifice.

These inlet fittings are available for assembly into either first stage of single stage regulators. All have 1/4" M. NPT connections and are machined from brass.



3199W



970

970AX

970AXS

970AW

970HT

970S